

Product Description

The SenseWear[®] display is a powerful and convenient way for wearers of the SenseWear[®] Pro Armband to get up to the minute feedback on a variety of important metabolic and energy related parameters.



Features:

Get up to the minute feedback of daily calorie, step and activity progress in a small, wearable display

Set personal targets and get feedback for achieving daily calorie, step and activity goals

Set the personal TRIP odometer to track daily workouts

View never before seen activity intensity (moderate and vigorous), calorie per minute and METS feedback in a continuous free-living monitor

Get the information you want when you want it through a simple and intuitive interface

Wear the most versatile display of its kind – on the wrist, pants, shirt, workbag – concealed or revealed - virtually anywhere on or near the body

Sync with multiple armbands of different subjects without a PC

Large digit display and backlight for easy, anywhere reading

User replaceable battery




PATENT NOTICE: US6,527,711; US6,595,929; US6,605,038; US7,020,508; USD439,981; EP1,292,217; EP1,292,218; and Worldwide Patents Pending

Copyright © 2007 BodyMedia, Inc. All rights reserved. Other product and brand names may be trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without notice. Last updated: 02.06.2007

Specifications

- User-replaceable coin cell battery (2032)
- RF Frequency: 2.4 GHz
- Transmittal output power: <1mW
- Transmission distance: 1.5 meters
- Size: 40 mm diameter, height: 13mm
- Weight: 1 oz. (28g)
- Materials: Nylon, polycarbonate, ABS, polyurethane, stainless steel
- Operating temperature/humidity: 0° C to +45° C (32° F to 113° F)/100% RH non-condensing
- Storage temperature/humidity: 0° C to +45° C (32° F to 113° F)/100% RH non-condensing

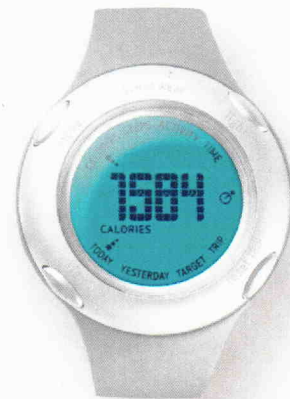

Included with Display

- SenseWear[®] display Quick-Clip™
- Wrist strap
- 2032 coin cell battery

System and Software Requirements

- Windows 2000, XP
- 1GHz processor or higher
- SenseWear[®] Pro 3 armband
- SenseWear[®] Pro Software 6.0
- One available USB port

To order:

Contact our sales department for more information.

4 Smithfield Street
11th Floor
Pittsburgh, PA 15222
USA
P.412.288.9901
F.412.288.9902
www.bodymedia.com

BodyMedia International Srl
Via G. Balzaretto, 15
20133 Milan, Italy
P.+39-02-2774121
F.+39-02-27741250
e-mail: info@armband.it
www.armband.it